




KINGTONE SWITCH INSTALLATION



Install The Kingtone Switch As Follows

1. Solder the Kingtone Switch as shown in the diagram.
2. Reassemble the guitar, but leave the Kingtone switch on the outside of the guitar.
5. Remove plastic protector tape from the slide switch.
4. Make adjustments to the treble bleed settings until you're happy.
5. Open the guitar back up and tightly install the Kingtone Switch with washer and nut.

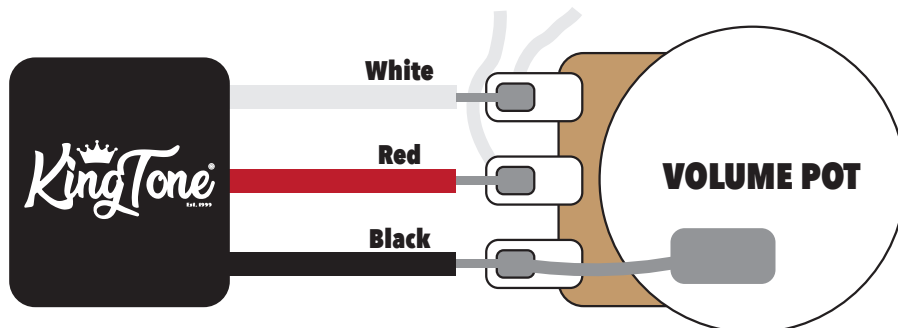

Add the White, Red and Black wires to the volume pot as shown.

If installing the Kingtone Switch on a Strat guitar, we recommend using the remaining tone pot to control either all pickups or just the middle and neck.


Use the wire taken from the middle leg of the old tone control and add it to the remaining tone control's middle leg and solder in place.

PLEASE CHECK OUT THE KINGTONE SWITCH INSTALLATION VIDEOS

www.kingtoneguitar.com/instructions



KINGTONE SWITCH SUGGESTED SETTINGS




FENDERY
Smooth Highs




SUPER BITE
Extreme Edge Added



LAWRENCE
Preserved High End



KIN
Highs, Upper Mids Added



SMITH
Glassy Top-end




SUBTLE
Gentle Highs Added



MOJO
Subtle Highs




ENHANCE
Gentle Mids, Highs Added




J.S.
Enhanced Highs




BYPASS
Treble Bleed Bypassed




DUNCAN
Boosted Highs



RESTORE
Very Subtly Restores Highs



KINGTONE
Added Edge



LINDY
Boosts Mids And Highs